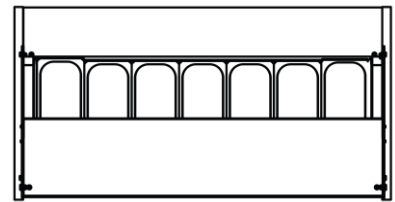
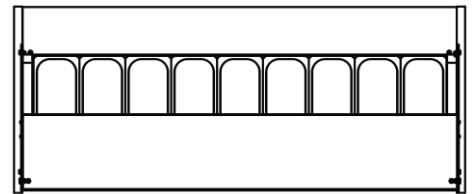


|                       |               |  |
|-----------------------|---------------|--|
| MODELS: <b>VBZ12S</b> | <b>VBZ15S</b> | <b>Ice Cream Static Display Case. Serie Ibiza S.</b> |
|-----------------------|---------------|--|

### General Strengths

- ✓ *The control systems present higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.*
- ✓ *All condenser units are tested 100%, in helium chambers to refrigerant leak detections.*
- ✓ *LED lighting in the canopy and cabinet sides reduces the energy consumption. Provides a much better light quality.*
- ✓ *Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.*


**VBZ12S**

**VBZ15S**


Review: 01 Date: 10/10/2018 VBZ12S, VBZ15S\_FT\_En\_0\_1

| MODELS        | Dimensions (mm) |       |      | Lateral Thickness (mm) | Nº Pans | Surface Exposure (m²) | Chamber Volume (L) | Gross Volume (L) | Regimen Temp. (°C) | Ref.          | Ref. Weight (gr.) | Net Weight (Kg.) |
|---------------|-----------------|-------|------|------------------------|---------|-----------------------|--------------------|------------------|--------------------|---------------|-------------------|------------------|
|               | Width           | Depth | High |                        |         |                       |                    |                  |                    |               |                   |                  |
| <b>VBZ12S</b> | 1250            | 670   | 1350 | 30+30                  | 7+7     | 0,50                  | 210                | 1066             | -15°C / -18°C      | R404A / R452A | 550               | 185              |
| <b>VBZ15S</b> | 1562            | 670   | 1350 | 30+30                  | 9+9     | 0,63                  | 263                | 1320             | -15°C / -18°C      | R404A / R452A | 750               | 210              |

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

**STANDARD FEATURES**

 > **Exterior**

- Exterior of laminated plate,
- AISI 304 Series Stainless Steel worktop,
- DM water resistant lacquered decorations and sides,
- Frontal tempered glass hinged,
- Lateral tempered glass,
- Doors on the back,
- LED lighting frontal decoration.

 > **Interior**

- Interior of laminated plate,
- Base of enamelled steel with regulators,
- Upper profile with LED lighting,
- Anodized aluminium profiles.

 > **Insulation**

- Insulation by free CFC's polyurethane foam high-pressure injected with density 40 Kg/m<sup>3</sup>.
- Zero ODP and Low GWP.

 > **Colour Standard range to choose between:**

- Maroon RAL 3003, Red RAL 3001, Pink RAL DESIGN 3504035, Orange RAL 2003, Yellow RAL 1018, Beige RAL 1001, Blue RAL 5015, Sky blue RAL DESIGN 2108025, Green dark RAL 6002, Violet RAL 4007, Pistachio RAL DESIGN 1107060, White RAL 9016, Black RAL 9017.

 > **Refrigeration**

- Temperature and defrost regulated by a digital controller,
- Hot gas defrosts,
- Refrigerated reserve in the chamber interior,
- System of ventilated condensation,
- System of forced evaporation,
- Evaporator coil coated with anti-corrosion material.
- Climate class 4 (30°C, 55%HR).

 > **Electrical**

- Electrical connection: 230 V / 1 ph / 50 Hz.


**OPTIONAL**

- Electrical connection 220 V / 1 ph / 60 Hz,

| MODELS        | Dimensions Palletizing (mm) |       |      | Crated Weight (Kg.) | Power (W) | Comp. (HP) | Cooling Power (W to -30°C) | Cons. (kWh/24h) | Inten. (A) | Level Noise (dB) | Container 20' / 40' / 40' HC | Trailer |
|---------------|-----------------------------|-------|------|---------------------|-----------|------------|----------------------------|-----------------|------------|------------------|------------------------------|---------|
|               | Width                       | Depth | High |                     |           |            |                            |                 |            |                  |                              |         |
| <b>VBZ12S</b> | 1410                        | 770   | 1325 | 205                 | 510       | 1/3        | 399                        | 11,2            | 2,8        | 65,3             | 11 / 23 / 46                 | 50      |
| <b>VBZ15S</b> | 1722                        | 770   | 1325 | 215                 | 530       | 1/3        | 399                        | 11,5            | 2,8        | 66,9             | 7 / 15 / 30                  | 35      |


WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

MODELS: **VBZ12S** **VBZ15S**

*Ice Cream Static Display Case. Serie Ibiza S.*


**PLAN VIEW**

**FRONT VIEW**

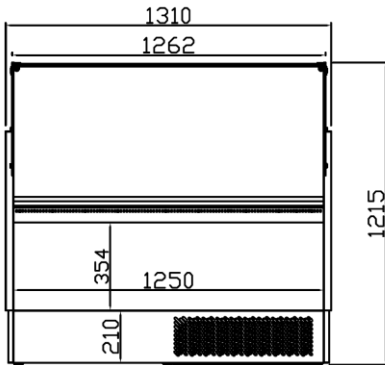


**VBZ12S**


**TOP VIEW**

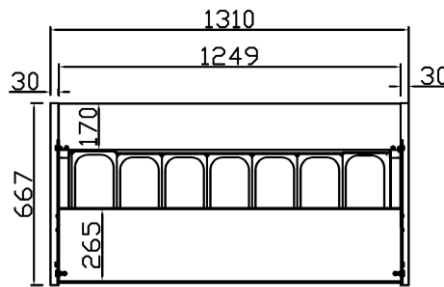


**SIDE VIEW**

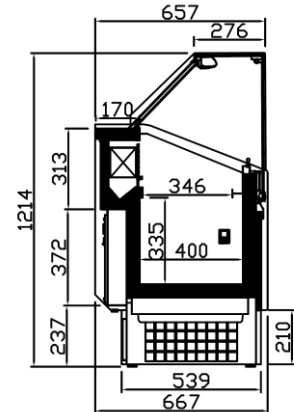

**VBZ\_S**

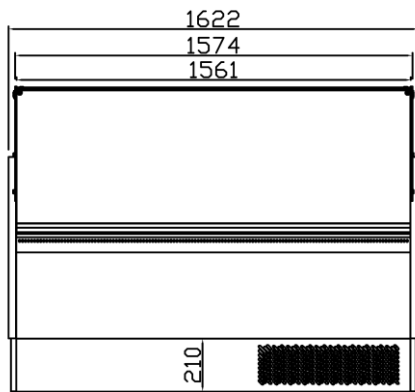


**VBZ15S**

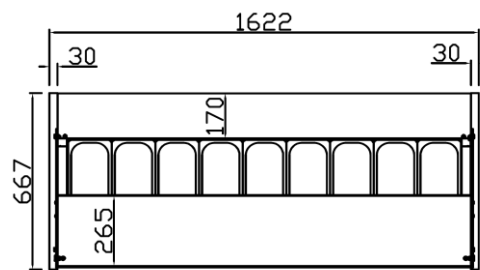

**CONNECTIONS**

| MODELS        | A (mm) | B (mm) | C (mm) | D (mm) |
|---------------|--------|--------|--------|--------|
| <b>VBZ12S</b> | 75     | 50     | 885,6  | 309    |
| <b>VBZ15S</b> | 75     | 50     | 886,5  | 309    |

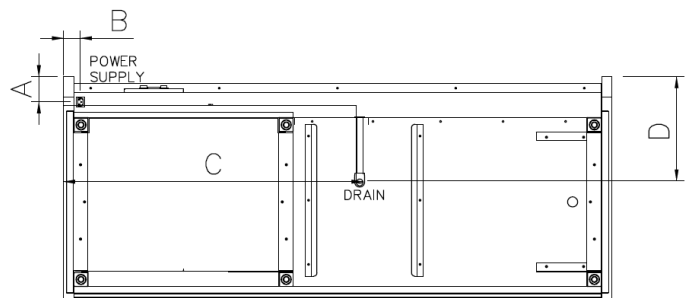

Review: 01 Date: 10/10/2018 VBZ12S, VBZ15S\_FT\_En\_0\_1

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**Infrico**  
 Ctra. de Aguilar A-318 por Moriles km. 15,5 – A-3132  
 14900 Lucena (Córdoba)  
 Spain

[www.infrico.com](http://www.infrico.com)  
 info@infrico.com  
 Tel. 00 34 957 51 03 03  
 Fax. 00 34 957 51 03 04

APPROVALS:

AVAILABLE AT:

